

SRA212N-008P8



8 channel real-time Linux-based network video recorder, 2 x 3.5" HDD Bay, 8 port built-in PoE switch, H.264, pentaplex operations, plug and play, dual network interface, and remote management on various devices



Why DivioTec?

DivioTec's aim is to transcend the capabilities of the human eye and deliver an entirely new field of view. Our integrative skills and our 20 years of industry experience are constantly driving new innovations.

Our simple, easy-to-use interfaces and our rock-solid security hardware are rapidly earning the respect and confidence of our clients.

We also make a point of listening carefully to our customers' needs, applying what we learn to develop outstanding new products and a culture of exceptional service.

At DivioTec, our experience is your protection.

- Highly reliable Linux-embedded NVR with 3 year warranty
- One click installation: Plug-n-Play with integrated cameras
- H.264 SDSTM (Smart Dynamic Streaming) Technology: dual stream recording, 8 channel simultaneous playback without latency, reduces CPU usage and increases system stability
- Free DDNS service: user can set up a free fixed address for remote access instead of getting a IP address every time
- Free central management software (CMS Pro) up to 16 sites/512 channels for multiple device management, upgradable to professional Expert Command Center System (ECCS100) up to 2000 channel management
- Up to 8 channel real-time live view display, recording, and playback, up to 5MP recording
- 8 port built-in PoE switch
- 2 x 3.5" HDD bays (each disk up to 4TB)
- Third-party network cameras supported via ONVIF and RTSP protocol
- Dual Ethernet ports, isolated local network environment for IP cameras
- Local configuration and display
- HDMI and VGA dual-monitor display with Full HD output
- Easy video export via USB or network
- Remote access through Web, CMS, mobile APP (Android & iOS)

Specifications


NVR: SRA212N-008P8	
Operating System	Embedded Linux
Operations	Live, recording, playback, backup, remote access
Control Mode	USB mouse, IR remote control, webpage, CMS
Video	
Video Compression	H.264
IP Camera Inputs	8 channels (each one is up to 2MP at 30 fps)
Audio	
Audio Mode	2-way audio; 1 x RCA, 1 x RCA
Display	
Display Mode	Full screen, multi-screen, PIP, sequence
Output	1 x HDMI (1920x1080, 60Hz), 1 x VGA (up to 1920x1080, 60Hz)
OSD	GUI
Remote View	iPhone, iPad, Android phones, Android tablet, IE Explorer, CMS (CMS Pro & ECCS100)
Recording	
Recording Mode	Continuous, scheduled, alarm, motion
Recording Capability	Up to 240 fps at Full HD (1920x1080), up to 5MP recording
Pre Recording	5 seconds
Post Recording	0~255 seconds
Playback & Backup	
Playback Capability	8 channel simultaneous playback
Playback Control	Play, pause, step, fast forward, rewind, fast rewind
Search Control	Date, time, events, channel
Export	USB, webpage, CMS
Internal Storage	2 x 3.5" HDD bays (each HDD up to 8TB)
External Storage	1 x eSATA port
Security	
Watermark	Yes
User Privilege	3 levels of user access support
Network	
ONVIF	Profile S
Protocol	IPv4/IPv6, TCP/IP, SMTP, SNMP, DHCP, HTTP, DDNS, PPPoE, UDP, SSL, RTP, RTSP, NTP
Bandwidth	Input: 80Mbps; Output: 64Mbps
Ethernet	1x10/100/1000 Mbps (WAN), 1-8 port 10/100Mbps with PoE (LAN)

Specifications

General	
Language	English, Thai, Chinese
I/O	2 x USB port 1 x RS485 (Support Pelco D, Pelco P) 4 x alarm in, 1 x alarm out
Power	NVR: DC48V 90W PoE switch: 60W (each port is up to 15W)
Dimension	319(W) x 53(H) x 297(D) mm ± 5mm
Operating Temperature	0°C to 50°C / 32°F to 122°F



Dimension Drawing

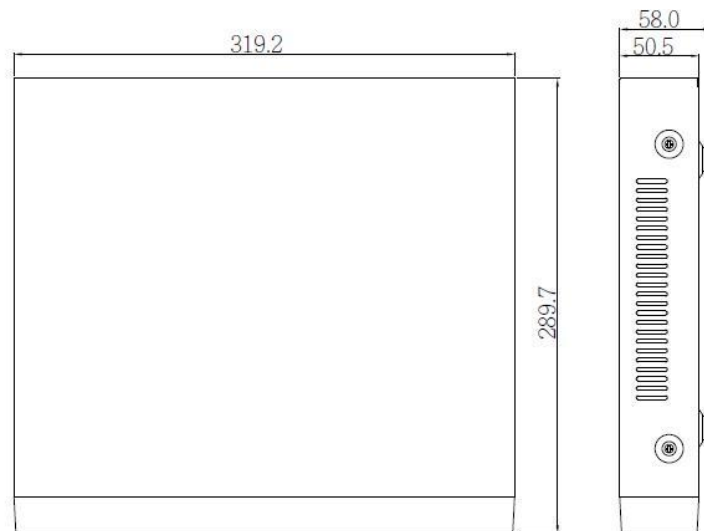

Dec. 09, 2015 released
 Specifications are subject to change without notice.
 Copyright © Diviotec Inc. 2013.
 All Rights Reserved